

LSR-3000

Condenser Microphone

The LSR-3000 is designed for professional vocal and instrumental work both on stage and in the studio. It utilizes a circular miniature membrane capsule with a cardioid polar pattern, the same used in the famous VM-44. This microphone is equipped with both a -12 dB switchable pad and 80Hz switchable high-pass filter.

The LSR-3000's body is made of solid brass and connects with a standard 3-pin XLR connector. It is packaged in a black leatherette box and includes a hard mount. An individual frequency curve is also included.



Specifications

Polar pattern: cardioid

Frequency response: 20 Hz to 20 kHz

Filter: 80 Hz high pass, switchable

Pre-attenuation: -12 dB, switchable

Max SPL (1% THD @ 1 kHz): 138 / 150 dB

Sensitivity @ 1 kHz: 13 mV / Pa \pm 1 dB

A-weighted noise level (IEC 179-A): 21 DB

Power supply: 48 V phantom

Current consumption: 4 mA

Output impedance: < 200 Ω

Minimum load impedance: 1 k Ω


Connector: 3-pin XLR

Length: 7.28" (185 mm)

Diameter: 0.94" / 1.85" (24 / 47 mm)

Weight: 10.41 oz. (295 g)

Frequency Chart: LSR-3000

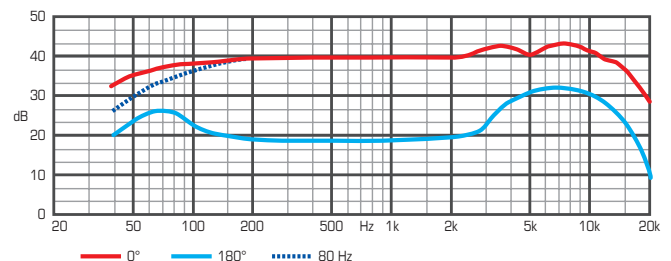

Exclusively distributed in the Americas by



9770 Silicon Prairie Pkwy • Madison, WI 53593-8442 USA
tel: 608-227-2040 • fax: 608-831-1890